


CONNECT NON-PERFORATED TO EXISTING CONCRETE MANHOLE AT EL. 100.3. GROUT PIPE TO MAKE WATER TIGHT.

SAWCUT EXISTING PAVEMENT, NEW PAVEMENT TO MATCH EXISTING THICKNESS AND TYPE

NEW 6 IN. NDS SOLID PLASTIC YARD DRAIN (2 REQUIRED) WITH 4 IN. DIA OUTLET CONNECTIONS

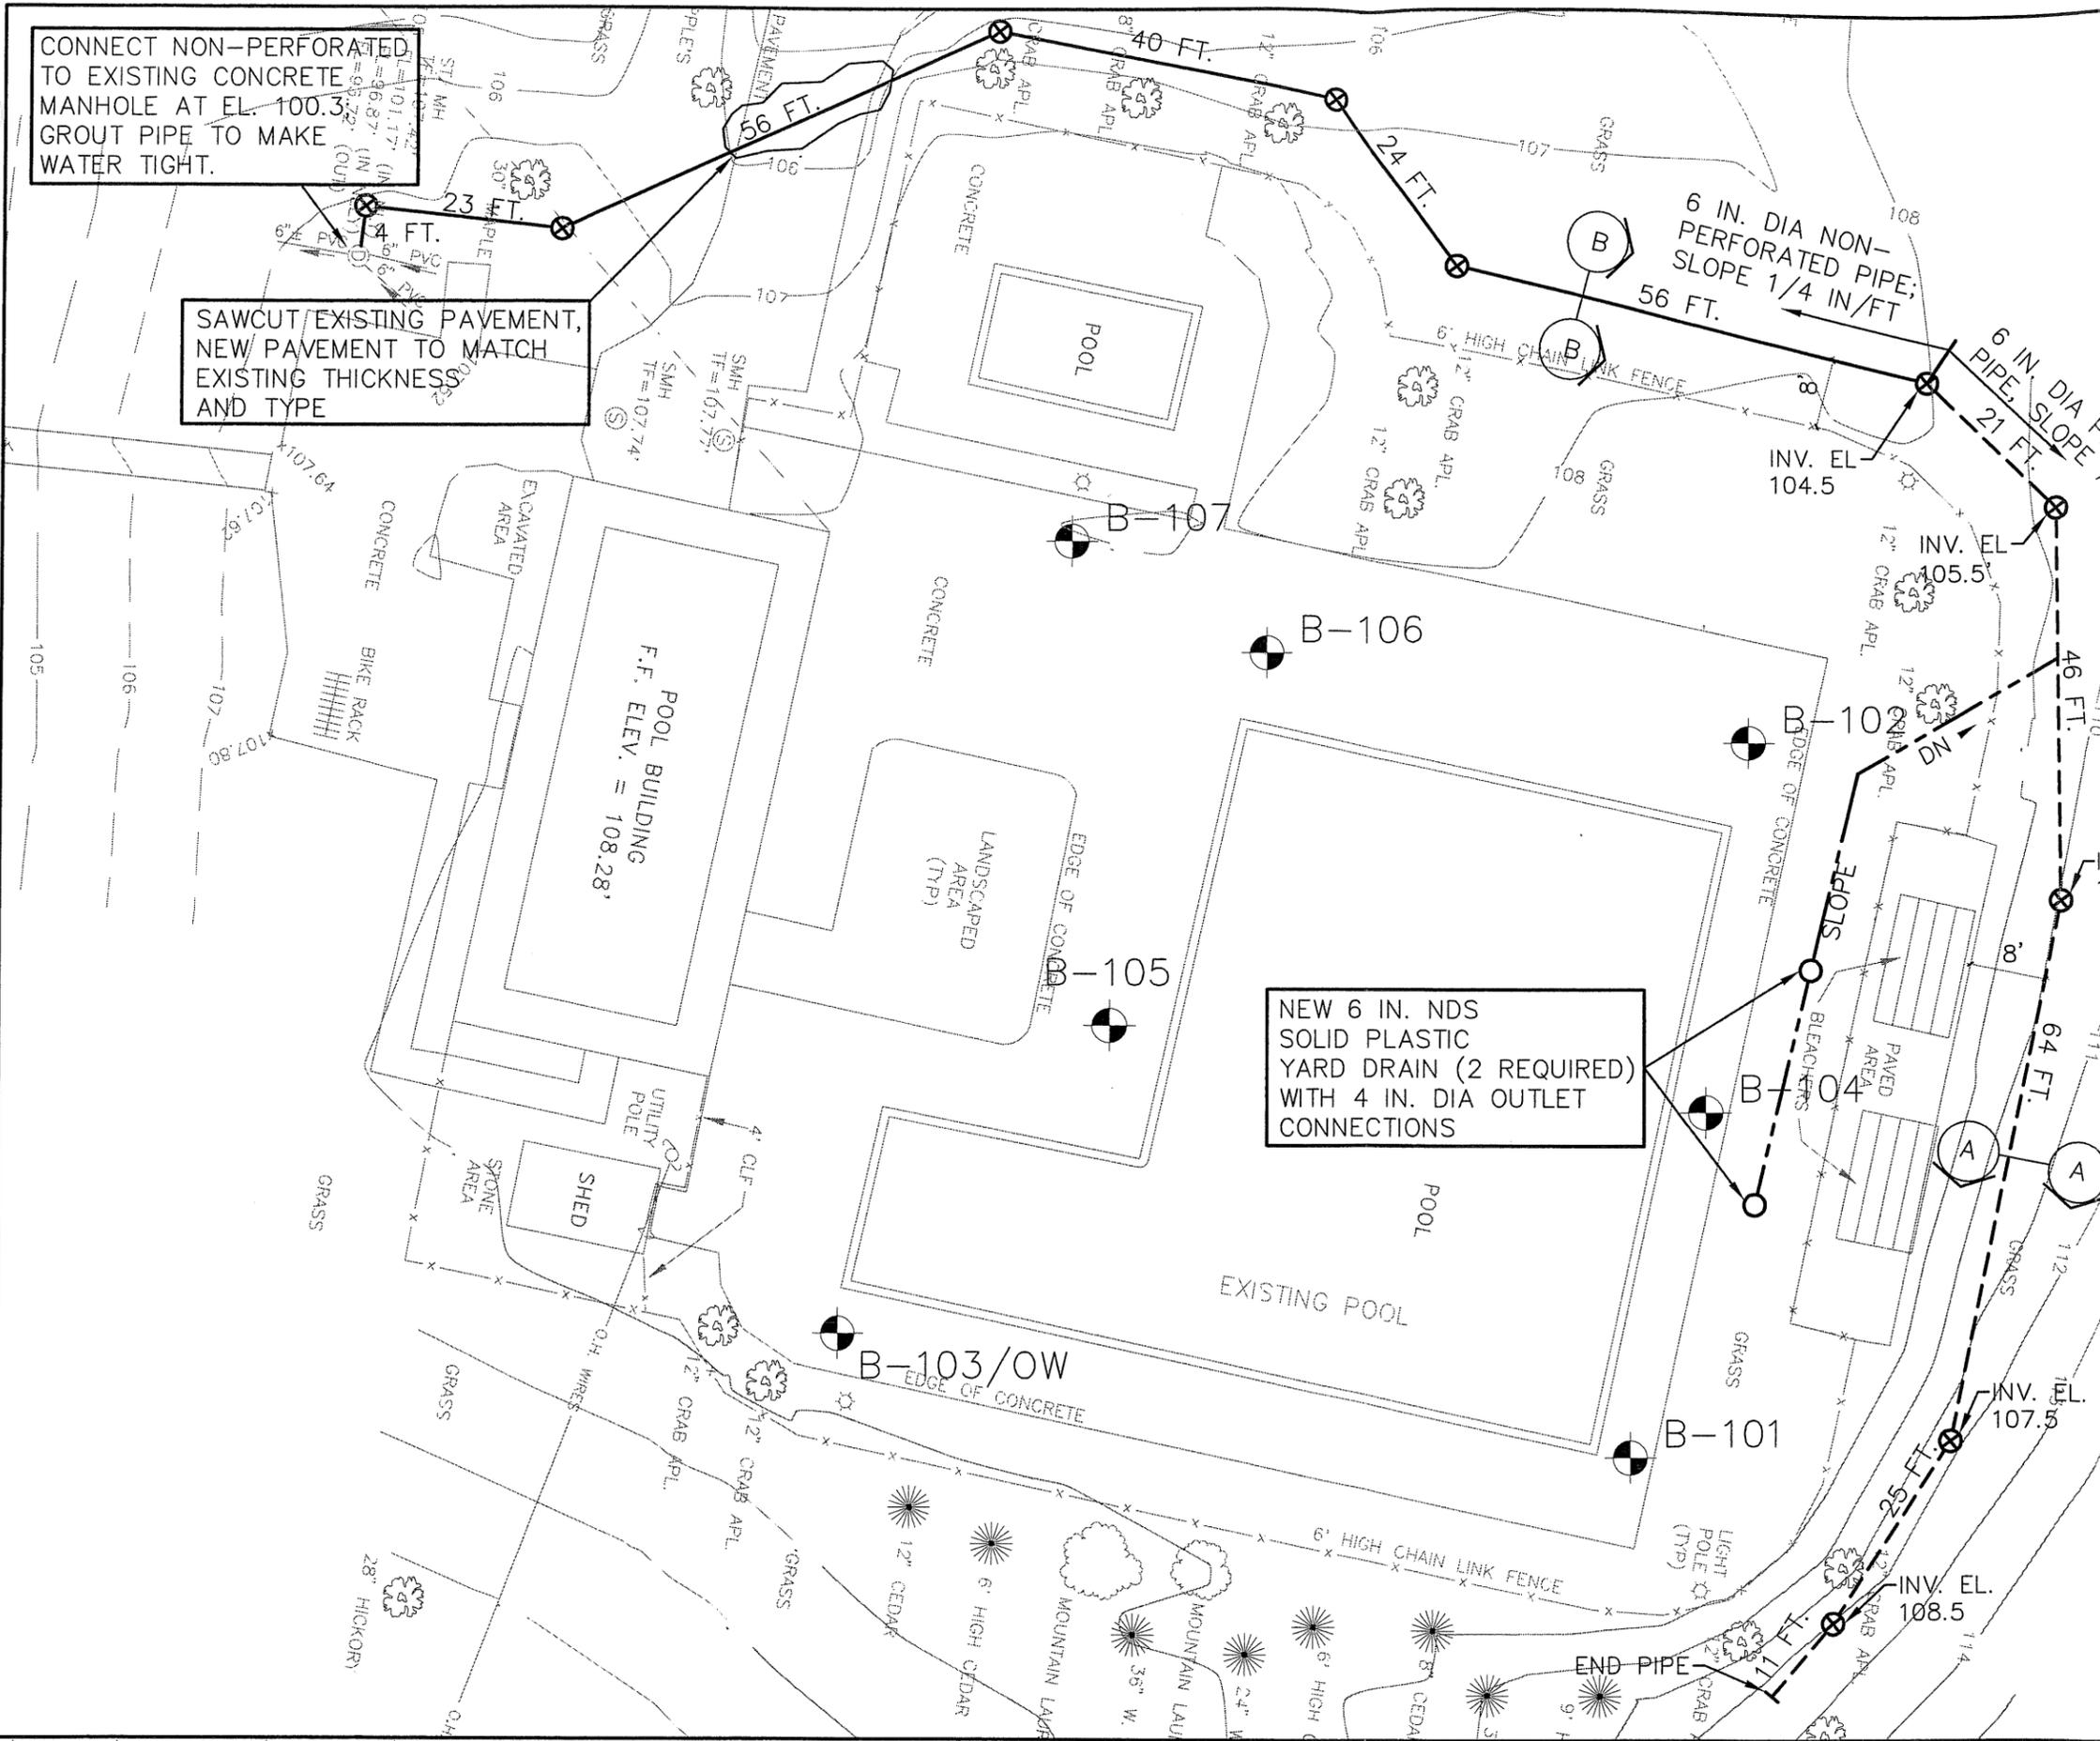

LEGEND:

- PROPOSED 6 IN. DIA PERFORATED PIPE (APPROX. LENGTH SHOWN PER RUN)
- PROPOSED 6 IN. DIA NON-PERFORATED PIPE (APPROX. LENGTH SHOWN PER RUN)
- ⊗ NEW CLEANOUT LOCATION.
- ⊙ TEST BORING DRILLED OCTOBER 3, 2006 BY GENERAL BORINGS, INC.

NOTES:

1. BASE PLAN PREPARED FROM TOPOGRAPHIC SURVEY PREPARED FOR TOWN OF VERNON HENRY-POOL AREA VERNON, CT BY GARDNER AND PETERSON TSS COCIATES, LLC. DATED OCTOBER 15, 2007.
2. SEE DRAWING CD-2 FOR SECTION A-A AND B-B.

GNCB
 Gible Norden Champion Brown
 Consulting Engineers, Inc.
 130 ELM STREET
 POST OFFICE BOX 802
 OLD SAYBROOK
 CONNECTICUT 06475
 PHONE: 860 388 1224
 FAX: 860 388 4613
 GNCBENGINEERS.COM

**HENRY PARK - POOL AREA
 VERNON, CONNECTICUT
 CURTAIN DRAIN LAYOUT**
 SCALE: 1 IN = 20 FT OCTOBER 2007